


19.636 MAX
18.312
HOLE TO HOLE
17.812
INSIDE RAIL

.390 MIN
DOOR CLEARANCE

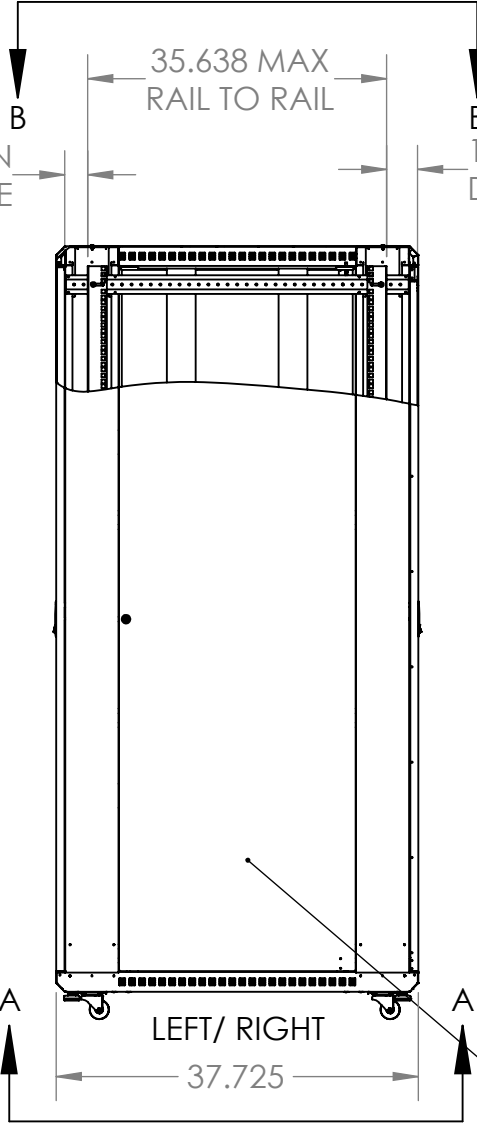

NOTE:
1. 19" EIA RACK MOUNT COMPLIANT.
2. RAILS ACCEPT 3/8" CAGENUT.
3. BLACK POWDER COAT.

1.210 MIN
DOOR CLEARANCE

HINGED/
REMOVABLE
PERFORATED
DOOR

KEYED LOCK
FRONT, SIDES
AND REAR

HINGED/
REMOVABLE
SOLID DOOR


80.505

FRONT
24.000



LEFT/ RIGHT
37.725

HINGED/ REMOVABLE
SIDE PANELS

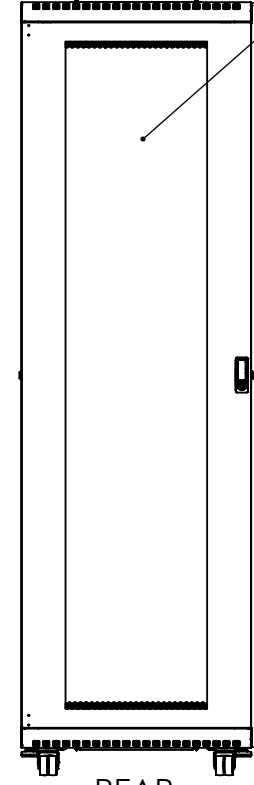

REAR

VENTING FRONT,
SIDES AND REAR,
TOP AND BOTTOM

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ± 1/8
ANGULAR: BEND ± 1 DEGREE
TWO PLACE DECIMAL ± .03
THREE PLACE DECIMAL ± .01

WEB PRINT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
KENDALL HOWARD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF KENDALL HOWARD
IS STRICTLY PROHIBITED.

NEXT ASSY	USED ON
APPLICATION	

MATERIAL	FINISH
DO NOT SCALE DRAWING	

NAME	DATE
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

KENDALL HOWARD

TITLE:
**42U LINIER FS SOLID
FRONT/ VENTED REAR**

SIZE	DWG. NO.	REV
A	3106-3-001-42 WP	

SCALE: 1:20 WEIGHT: 176.62 SHEET 1 OF 2

5

4

3

2

1

